



## Chip Resistor / 贴片电阻器

- **SMD Resistors - FCR, RCA, RCN Series / 贴片电阻 ----- 1**
- **Precision Chip Resistors - AR Series / 精密贴片电阻 ----- 5**
- **Anti-Corrosive Thin Film Precision Chip Resistor - PR Series / 薄膜贴片电阻 ---- 10**

Notice: Specification Changed or Version Updated will be posted at irregular intervals.  
All Updated and Final Specifications, Please Confirm with TOKEN ELECTRONICS REPRESENTATIVES.



<http://www.token.com.tw>



[rfq@tokenonline.net](mailto:rfq@tokenonline.net)

**Taiwan:** No. 137, Sec. 1, Chung Shin Rd., Wu Ku Hsiang, Taipei Hsien, Taiwan, R.O.C  
TEL: 886-2-2981 0109; FAX: 886-2-2988 7487

**China:** 12F, Zhongxing Industry Bld., Chuangye Rd., Nanshan District, Shenzhen, Guangdong  
TEL: 86-755-2605 5363, 2605 5364; FAX: 86-755-2605 5365



# Chip Resistor


## FCR, RCA, RCN Series - SMD Resistors

Token FCR, RCA, RCN Series SMD Resistor are formed by vacuum depositing a resistive alloy on a usually flat substrate of ceramic. Photo-lithographic or similar techniques are used to define the final geometry and interconnecting traces. This technology provides for close ratio matching and tracking in a network, as well as low stand-alone temperature coefficient and resistance tolerance. Types includes precision smd (FCR), smd array (RCA), and networks (RCN).



### ► Chip Thick Film Dimension (Unit: mm)

Type	L	W	H	L1	L2
FCR 03	1.60 ± 0.10	0.80 ± 0.10	0.45 ± 0.10	0.30 ± 0.20	0.30 ± 0.20
FCR 05	2.00 ± 0.15	1.25 ± 0.15	0.50 ± 0.10	0.40 ± 0.20	0.35 ± 0.15
FCR 06	3.10 ± 0.15	1.55 ± 0.15	0.55 ± 0.10	0.50 ± 0.25	0.50 ± 0.25


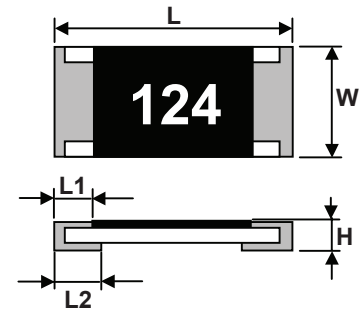


### ► Chip Thick Film Characteristic

Type	Power Rating at 70°C	Max. RCWV	Max. Overload Voltage	Resistance Tolerance(%)	Resistance Range (Ω)		Standard Resistance Values
					Min.	Max.	
FCR03	1/10W	50V	100V	± 1% (F)	10Ω	1MΩ	E-96
				± 5% (J)	1Ω	10MΩ	E-24
FCR05	1/8W	150V	300V	± 1% (F)	10Ω	1MΩ	E-96
				± 5% (J)	1Ω	10MΩ	E-24
FCR06	1/4W	200V	300V	± 1% (F)	10Ω	1MΩ	E-96
				± 5% (J)	1Ω	10MΩ	E-24

### ► Chip Array Dimension (Unit: mm)

Type	L	W	H	L1	L2	P	Q
RCA03-4D(0603)	3.2±0.2	1.6±0.15	0.5±0.1	0.30±0.15	0.35Max	0.8±0.1	0.5±0.1

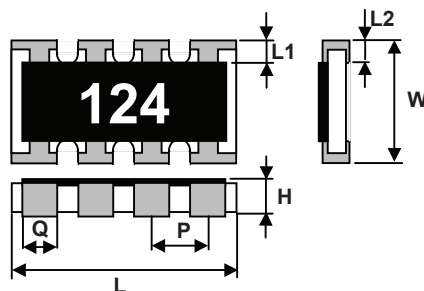

### ► Chip Array Characteristic



Type	Rated Power at 70°C	Max. Working Voltage	Max. Overload Voltage	T.C.R. (ppm/°C)	Resistance Range		Jumper Rated Current	Jumper Resistance Value	Operating Temperature Range
					F(±1%) E-96	G(±2%) J(±5%) E-24			
RCA03-4D (0603)	0.063	50V	100V	± 200	100Ω~470KΩ	10Ω~1MΩ	1A	50mΩ MAX	-55°C~+125°C



# Chip Resistor

## ► Chip Network Dimension (Unit: mm)

Type	L	W	H	L1	L2	P	Q
RCN06-10R RCN06-10S	6.4 ± 0.2	3.1 ± 0.2	0.55 ± 0.1	0.5 ± 0.3	0.5 ± 0.2	1.27 ± 0.1	0.8 ± 0.2

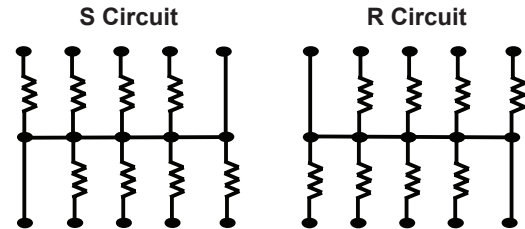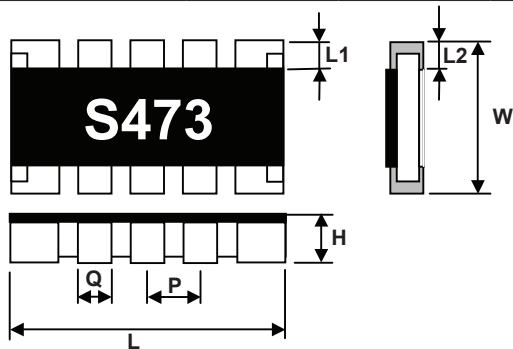

## ► Chip Network Characteristic

Type	Rated Power at 70°C	Max. Working Voltage	Max. Overload Voltage	T.C.R. (ppm/°C)	Resistance Range	Number of Terminals	Number of Elements	Operating Temperature Range
					J (±5%) E-12			
RCN06-10R RCN06-10S	1/16W	50V	100V	±200	10Ω~1MΩ	10	8	-55°C~+125°C

## ► Chip Specifications

Item	Specification	Test Method
DC Resistance	J: ±5%, F: ±1%	JIS C 5202 5.1
Temperature Coefficient of Resistance(TCR)	J: ±200ppm/°C F: ±100ppm/°C	JIS C 5202 5.2 / IEC 115-1 4.8.4.2; T1 T2 Test emperature: 25°C→-55°C 25°C →-55°C
Short Time Overload	J:ΔR≤±(2%+0.1Ω) F:ΔR≤±(1%+0.05Ω)	JIS C 5202 5.5 / IEC 115-1 4.13; 2.5xRated voltage (Max. Overload Voltage) for 5 sec. measure resistance after 30 minutes
Resistance to Solder Heat	J:ΔR≤±(1%+0.1Ω) F:ΔR≤±(0.5%+0.05Ω) No mechanical damage	JIS C 5202 6.4 / IEC 115-1 4.18; With 260 ± 5 °C for 10 ± 1 sec.
Solderability	Over 95% of termination must be covered with solder	JIS C 5202 7.4 / IEC 115-1 4.17; After immersing flux, dip in the 235 ± 5°C molten solderbath for 2 ± 0.5 sec.
Temperature Cycle	J:ΔR≤±(1%+0.1Ω) F:ΔR≤±(0.5%+0.05Ω) No mechanical damage	JIS C 5202 7.4 / IEC 115-1 4.19; Repeat 5 cycles as follow; -55°C(30minutes)+25°C(10~15minutes) +125°C(30minutes)+25°C(10~15minutes)
Terminal Strength	ΔR≤±(0.5%+0.05Ω) No mechanical damage	JIS C 5202 6.1; 500g for 10 seconds
Load Life	J:ΔR≤±(3%+0.1Ω) F:ΔR≤±(1%+0.05Ω)	JIS C 5202 7.10 / IEC 115-1 4.25.1; Permanent resistance change after 1000+48/-0 hours (1.5 hours ON,0.5hour OFF) at RCWV or Max. Keep the element at 70 ± 3°Cambient
Load Life Humidity	J:ΔR≤±(3%+0.1Ω) F:ΔR≤±(1%+0.05Ω)	JIS C 5202 7.9 / IEC 115-1 4.24.2; Maintain the temperature of the element at 40 ± 2 °Cand 90~95% RH with the ratedvoltage applied. Cycle ON for 1.5hours and Off for 0.5 hour for 1000+48/-0 hours.After one hour, measure the resistance value.
Intermittent Overload	ΔR≤±(5%+0.1Ω) No mechanical damage	JIS C 5202 5.8; 2.5xRated Voltage(Max.OverloadVoltage), 1secON,25sec OFF, test 10,000 cycles





# Chip Resistor

## ► Chip Resistance Marking



3 digit marking  
for E24(J)  
100~10Ω  
122~1.2KΩ  
473~47KΩ  
105~1MΩ



4 digit marking  
for E96(F)  
22R1~22.1Ω  
1020~102Ω  
1542~15.4KΩ




3 digit marking  
for E96(F)  
02C  
 $102 \times 10^2 = 10.2K\Omega$




15E  
 $140 \times 10^4 = 1.4M\Omega$

## ► Chip Characteristic Taping

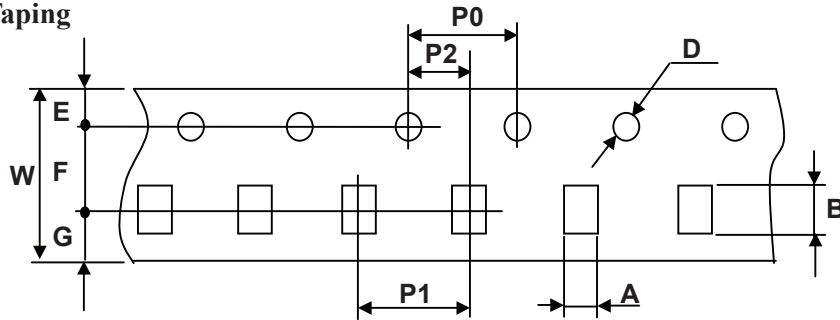

Codes	A	B	W	F	E	P1	P2	P0	D	G
FCR03	1.10±0.20	1.90±0.20	8.0±0.3	3.50±0.05	1.75±0.10	4.0±0.1	2.00±0.05	4.0±0.1	1.5±0.1 -0	2.75
FCR05	1.65±0.20	2.45±0.20	8.0±0.3	3.50±0.05	1.75±0.10	4.0±0.1	2.00±0.05	4.0±0.1	1.5±0.1 -0	2.75
FCR06	2.00±0.10 -0.15	3.57±0.10 -0.15	8.0±0.3	3.50±0.05	1.75±0.10	4.0±0.1	2.00±0.05	4.0±0.1	1.5±0.1 -0	2.75

## ► Chip Resistor Package

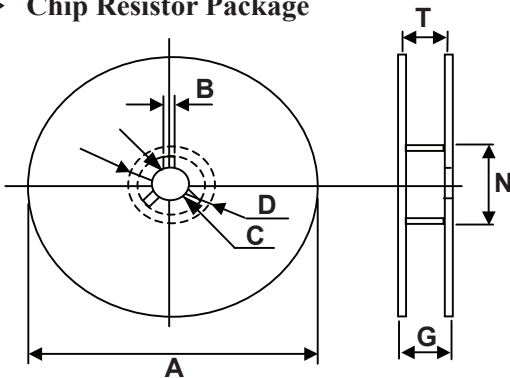

Symbol	Dimension
A	178 ± 2.0
N	80.0 ± 0.5
C	13.0 ± 0.5
D	20min
B	20 ± 0.5
G	100 ± 1.5
T	14.9 max.

## ► Chip Resistor Part Number Explanation



① Type: SMDNetwork

② Size:06

③ Number of Terminals:10

④ Circuit Structure;R Circuit,S Circuit

⑤ Nominal Resistance

Code	Resistance Tolerance
3-Digit	E12 Series EX 10Ω=100 100Ω=101

⑥ Resistance Tolerance

Code	Resistance Tolerance
J	±5%

⑦ TCR


Code	Packaging
TP	Taping (Paper)
BA	Bulk Case



# Chip Resistor

Continued from the preceding page.

## Chip Resistor Part Number Explanation



① Type: SMD

② Size

Code	Size
03	0603
05	0805
06	1206

③ Nominal Resistance

Code		
SMD Elements	3-Digit	E24 Series EX 10Ω=100 47Ω=470
	4-Digit	E96 Series EX 10.2Ω=10R2 10KΩ=1002
Jumper		000

④ Resistance Tolerance

Code	Resistance Tolerance
F	±1%
J	±5%

⑤ TCR

Code	Packaging
TP	Taping (Paper)
BA	Bulk Case

## Chip Resistor Part Number Explanation



① Type: SMDArray

② Size:03(0603)

③ Number of circuits: 4(4 circuits)

④ Electrode Structure: D(protruding electrode)

⑤ Nominal Resistance

Code		
SMD Elements	3-Digit	E24 Series EX 10Ω=100 47Ω=470
	4-Digit	E96 Series EX 10.2Ω=10R2 10KΩ=1002
Jumper		000

⑥ Resistance Tolerance

Code	Resistance Tolerance
F	±1%
G	±2%
J	±5%

⑦ TCR

Code	Packaging
TP	Taping (Paper)
BA	Bulk Case



# Chip Resistor

## Precision Chip Resistors - AR Series



### ► Features

- Thin Film Passivated NiCr Resistor
- Very Tight Tolerance from  $\pm 0.01\% \sim \pm 1\%$
- Extremely Low TCR from  $\pm 5\text{PPM}/^\circ\text{C} \sim \pm 50\text{PPM}/^\circ\text{C}$
- Wide R-Value range
- Products with Pb-free Terminations Meet RoHS Requirements

### ► Precision Chip Resistor Applications

- Medical Equipment
- Testing / Measurement instrument
- Consumer Product
- Printer Equipment
- Automatic Equipment Controller
- Converters
- Communication Device, Cell phone, GPS, PDA

### ► Precision Chip Resistor Construction

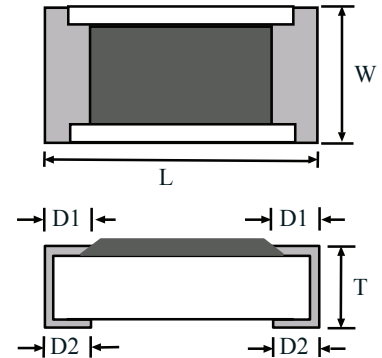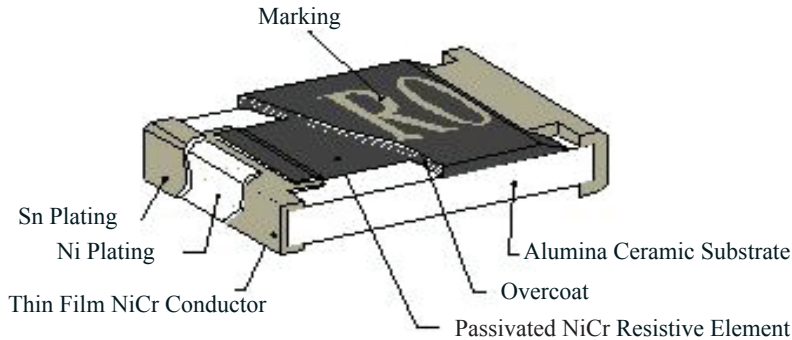

### ► Precision Chip Resistor Dimensions (Unit: mm)

Codes	L	W	T	D1	D2
AR02	1.00 $\pm$ 0.05	0.50 $\pm$ 0.05	0.30 $\pm$ 0.05	0.20 $\pm$ 0.10	0.20 $\pm$ 0.10
AR03	1.55 $\pm$ 0.10	0.80 $\pm$ 0.10	0.45 $\pm$ 0.10	0.30 $\pm$ 0.20	0.30 $\pm$ 0.20
AR05	2.00 $\pm$ 0.15	1.25 $\pm$ 0.15	0.55 $\pm$ 0.10	0.30 $\pm$ 0.20	0.40 $\pm$ 0.25
AR06	3.05 $\pm$ 0.15	1.55 $\pm$ 0.15	0.55 $\pm$ 0.10	0.42 $\pm$ 0.20	0.35 $\pm$ 0.25
AR10	4.90 $\pm$ 0.15	2.40 $\pm$ 0.15	0.55 $\pm$ 0.10	0.60 $\pm$ 0.30	0.50 $\pm$ 0.25
AR12	6.30 $\pm$ 0.15	3.10 $\pm$ 0.15	0.55 $\pm$ 0.10	0.60 $\pm$ 0.30	0.50 $\pm$ 0.25

### ► Precision Chip Resistor Standard Electrical Specifications

Type	Power Rating at 70°C	Operating Temp. Range	Max Operating Voltage	Max Overloading Voltage	Resistance Tolerance ( $\pm\%$ )	Resistance Range	TCR ( $\pm\text{PPM}/^\circ\text{C}$ )
AR02 (0402)	1/16W	-55 ~ +155°C	25V	50V	0.01, 0.05, 0.1, 0.25, 0.5	50 $\Omega$ ~2K $\Omega$	5
					0.01, 0.05, 0.1, 0.25, 0.5	50 $\Omega$ ~12K $\Omega$	10, 15
					0.01, 0.05	50 $\Omega$ ~12K $\Omega$	25, 50
					0.1, 0.25, 0.5, 1	10 $\Omega$ ~100K $\Omega$	25, 50
AR03 (0603)	1/16W	-55 ~ +155°C	50V	100V	0.01, 0.05, 0.1, 0.25, 0.5	50 $\Omega$ ~8K $\Omega$	5
					0.01, 0.05, 0.1, 0.25, 0.5	25 $\Omega$ ~100K $\Omega$	10, 15
					0.01	25 $\Omega$ ~100K $\Omega$	25, 50
					0.05	4.7 $\Omega$ ~150K $\Omega$	25, 50
					0.1, 0.25, 0.5, 1	4.7 $\Omega$ ~402K $\Omega$	25, 50
					0.25, 0.5, 1	2 $\Omega$ ~4.6 $\Omega$	25, 50

Continued on the following page. ↘





# Chip Resistor

Continued from the preceding page.

Type	Power Rating at 70°C	Operating Temp. Range	Max Operating Voltage	Max Overloading Voltage	Resistance Tolerance (±%)	Resistance Range	TCR (±PPM/°C)
AR05 (0805)	1/10W	-55 ~ +155°C	100V	200V	0.01, 0.05, 0.1, 0.25, 0.5	50Ω~16KΩ	5
					0.01, 0.05, 0.1, 0.25, 0.5	25Ω~200KΩ	10, 15
					0.01	25Ω~200KΩ	25, 50
					0.05	4.7Ω~500KΩ	25, 50
					0.1, 0.25, 0.5, 1	4.7Ω~1MΩ	25, 50
					0.25, 0.5, 1	1Ω~4.6Ω	25, 50
AR06 (1206)	1/8W	-55 ~ +155°C	150V	300V	0.01, 0.05, 0.1, 0.25, 0.5	50Ω~30KΩ	5
					0.01, 0.05, 0.1, 0.25, 0.5	25Ω~500KΩ	10, 15
					0.01	25Ω~500KΩ	25, 50
					0.05	4.7Ω~1MΩ	25, 50
					0.1, 0.25, 0.5, 1	4.7Ω~1MΩ	25, 50
					0.25, 0.5, 1	1Ω~4.6Ω, 1MΩ~2MΩ	25, 50
AR10 (2010)	1/4W	-55 ~ +155°C	150V	300V	0.01, 0.05, 0.1, 0.25, 0.5	50Ω~30KΩ	5
					0.01, 0.05, 0.1, 0.25, 0.5	25Ω~500KΩ	10, 15
					0.01	25Ω~500KΩ	25, 50
					0.05	4.7Ω~1MΩ	25, 50
					0.1, 0.25, 0.5, 1	4.7Ω~1MΩ	25, 50
					0.25, 0.5, 1	1Ω~4.6Ω, 1MΩ~2MΩ	25, 50
AR12 (2512)	1/2W	-55 ~ +155°C	150V	300V	0.01, 0.05, 0.1, 0.25, 0.5	50Ω~50KΩ	5
					0.01, 0.05, 0.1, 0.25, 0.5	25Ω~500KΩ	10, 15
					0.01	25Ω~500KΩ	25, 50
					0.05	4.7Ω~1MΩ	25, 50
					0.1, 0.25, 0.5, 1	4.7Ω~1MΩ	25, 50
					0.25, 0.5, 1	1Ω~4.6Ω, 1MΩ~2MΩ	25, 50

## Higher Power Rating Electrical Specifications - Precision Chip Resistors

Type	Power Rating at 70°C	Operating Temp. Range	Max Operating Voltage	Max Overloading Voltage	Resistance Tolerance (±%)	Resistance Range	TCR (±PPM/°C)
AR03 (0603)	1/10W	-55 ~ +155°C	50V	100V	0.10, 0.25, 0.50	10Ω~332KΩ	25, 50
AR05 (0805)	1/8W	-55 ~ +155°C	150V	300V	0.10, 0.25, 0.50	4.7Ω~1MΩ	25, 50
AR06 (1206)	1/4W	-55 ~ +155°C	200V	400V	0.10, 0.25, 0.50	4.7Ω~1MΩ	25, 50

• Token has the ability to manufacture above options based on customer's requirement.






# Chip Resistor

## ► Recommend Land Pattern (Unit: mm) - Precision Chip Resistors


Codes	A	B	C
AR12	4.90	1.60	3.10±0.2
AR10	3.60	1.40	2.50±0.2
AR06	2.00	1.15	1.70±0.2
AR05	1.00	1.00	1.35±0.2
AR03	0.80	1.00	0.90±0.2
AR02	0.50	0.50	0.60±0.2

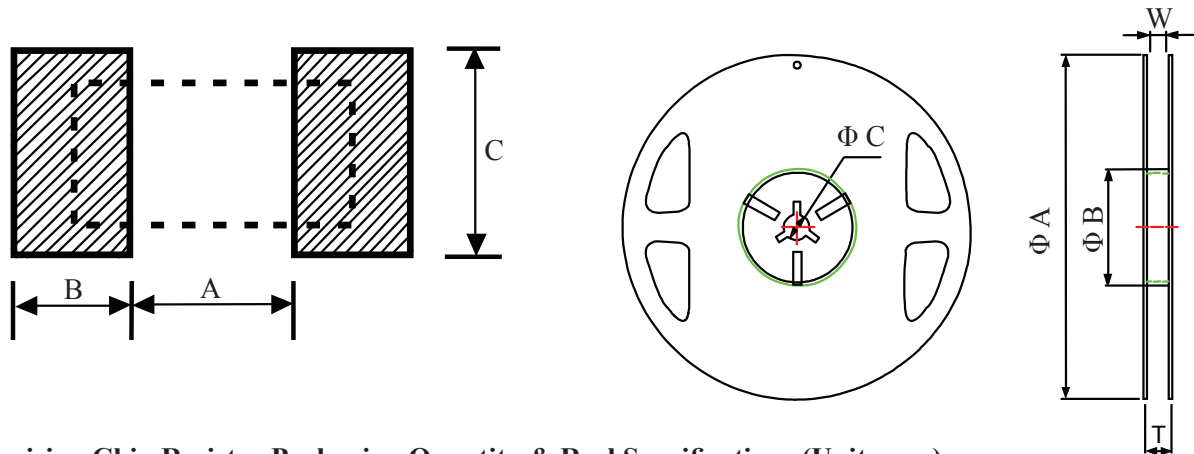

## ► Precision Chip Resistor Packaging Quantity & Reel Specifications (Unit: mm)

Codes	ΦA	ΦB	ΦC	W	T	Paper Tape (PCS)	Emboss Plastic Tape (PCS)
AR02	178±1	60.0±0.5	13.0±0.20	9.00±0.50	12.0±0.15	10,000	-
AR03	178±1	60.0±0.5	13.0±0.20	9.00±0.50	12.0±0.15	5,000	-
AR05	178±1	60.0±0.5	13.0±0.20	9.00±0.50	12.0±0.15	5,000	-
AR06	178±1	60.0±0.5	13.0±0.20	9.00±0.50	12.0±0.15	5,000	-
AR10	178±1	60.2±0.5	13.0±1.00	13.2±1.50	16.0±0.20	-	4,000
AR12	178±1	60.2±0.5	13.0±0.50	13.2±1.50	16.0±0.20	-	4,000

## ► Precision Chip Resistor Paper Tape Specifications (Unit: mm)

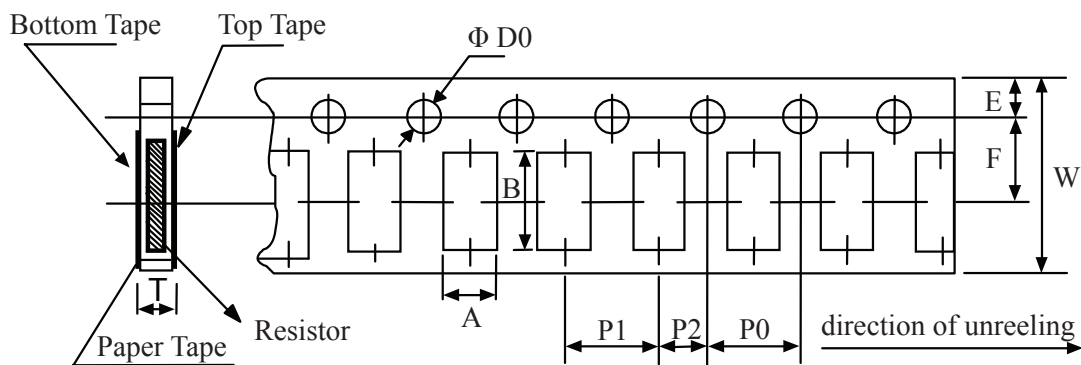


Codes	A	B	W	E	F	P0	P1	P2	ΦD0	T
AR02	0.70±0.05	1.16±0.05	8.00±0.10	1.75±0.05	3.5±0.05	4.00±0.10	2.00±0.05	2.00±0.05	1.55±0.05	0.40±0.03
AR03	1.10±0.05	1.90±0.05	8.00±0.10	1.75±0.05	3.5±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.55±0.05	0.60±0.03
AR05	1.60±0.05	2.37±0.05	8.00±0.10	1.75±0.05	3.5±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.55±0.05	0.75±0.05
AR06	2.00±0.05	3.55±0.05	8.00±0.10	1.75±0.05	3.5±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.55±0.05	0.75±0.05






# Chip Resistor

## ► Emboss Plastic Tape Specifications (Unit: mm) - Precision Chip Resistors

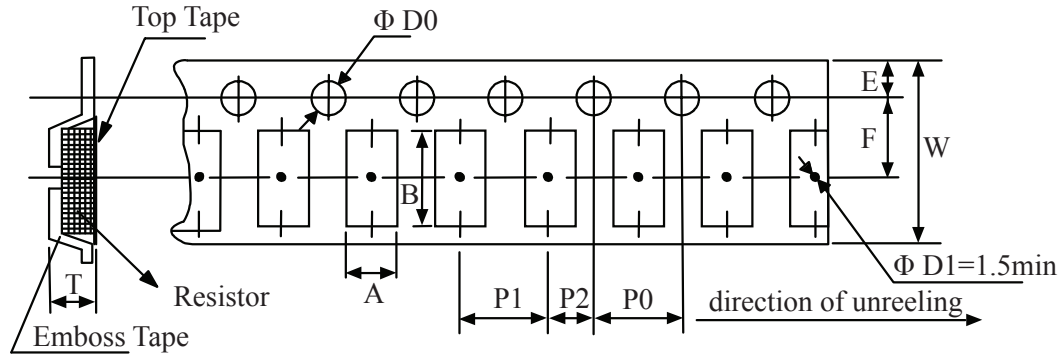

Codes	A	B	W	E	F	P0	P1	P2	ΦD0	T
AR10	2.85±0.10	5.45±0.10	12.0±0.10	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50±0.10	1.00±0.20
AR12	3.40±0.10	6.65±0.10	12.0±0.10	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50±0.10	1.00±0.20

## ► Precision Chip Resistor Derating Curve

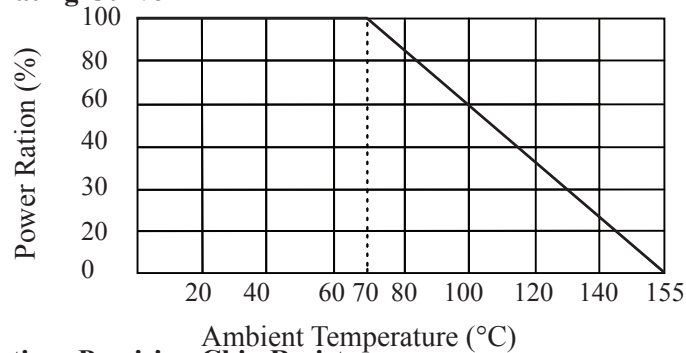

## ► Environmental Characteristics - Precision Chip Resistors

Item	Specification		Test Method
	Tol.≤0.05%	Tol.>0.05%	
Temperature Coefficient of Resistance	AS Spec		MIL-STD-202F Method 304 +25/-55/+25/+125/+25°C
Short Time Overload	ΔR±0.05%	ΔR±0.5%	JIS-C-5202-5.5
	ΔR±0.5% for high power rating		RCWV*2.5 or Max Overloading Voltage , 5 seconds.
Dielectric Withstand Voltage	By type		MIL-STD-202F Method 301 Apply Max Overload Voltage for 1 minute
Insulation Resistance	>1000M Ω		MIL-STD-202F Method 302 Apply 100VDC for 1minute
Thermal Shock	ΔR±0.05%	ΔR±0.25%	MIL-STD-202F Method 107G -55°C~150°C, 100cycles
Load Life	ΔR±0.05%	ΔR±0.2%	MIL-STD-202F Method 108A RCWV, 70°C, 1.5 hours ON, 0.5 hours OFF, 1000~1048 hours
	>7KΩ ΔR±0.5%		
	ΔR±0.5% for high power rating		
humidity (Steady State )	ΔR±0.05%	ΔR±0.3%	MIL-STD-202F Method 103B 40°C, 90~95%RH, RCWV 1.5 hours ON, 0.5 hours OFF, total 1000~1048 hours
	ΔR±0.5% for high power rating		
Resistance to dry heat	ΔR±0.05%	ΔR±0.2%	JIS-C-5202-7.2 96 hours @ +155°C without load
Low Temperature Operation	ΔR±0.05%	ΔR±0.2%	JIS-C-5202-7.1
	ΔR±0.5% for high power rating		1hour, -65°C, followed by 45minutes of RCWV
Bending Strength	ΔR±0.05%	ΔR±0.2%	JIS-C-5202-6.1.4 Bending Amplitude 3mm for 10seconds
Solderability	95%min coverage		MIL-STD-202F Method 208H; 260°C±5°C, 2±0.5(sec)
Resistance to Soldering Heat	ΔR±0.05%	ΔR±0.2%	MIL-STD-202F Method 210E; 260±5°C, 10±1 second


**Remark:** Storage Temperature: 25±3°C; Humidity < 80%RH





# Chip Resistor

## How to Order



### ① Product Type

### ② Dimensions(L×W)

Code	Dimensions(L×W)
02	1.00×0.50mm
03	1.60×0.80mm
05	2.00×1.25mm
06	3.00×1.50mm
10	4.90×2.40mm
12	6.30×3.10mm

### ③ Resistance Tolerance

Code	Resistance Tolerance
T	±0.01%
B	±0.10%
C	±0.25%
D	±0.50%
F	±1.00%

### ④ Packaging

Code	Packaging
T	Taping Reel
P	Bulk

### ⑤ TCR

Code	TCR
S	±5ppm /°C
B	±10ppm /°C
N	±15ppm /°C
C	±25ppm /°C
D	±50ppm /°C

### ⑥ Higher Power Rating

Code	Power Rating
	Standard / Special
V	1/4W
W	1/8W
X	1/10W

### ⑥ Resistance

Code	Resistance
1000	100Ω
2201	2200Ω
1002	10000Ω
4992	49900Ω
1003	100000Ω



# Chip Resistor

## Anti-Corrosive Thin Film Precision Chip Resistor - PR Series



### ► Precision Chip Resistor Features

- Special Passivated NiCr Film for Anti-Acid and Anti-Damp.
- Very Tight Tolerance from  $\pm 0.1\%$ .
- Extremely Low TCR from  $\pm 25$  PPM/ $^{\circ}\text{C}$ .
- Wide R-Value Range.

### ► Precision Chip Resistor Applications

- Automotive; High-end Computer; Industrial Equipment.
- Automatic Equipment Controller; Medical Equipment.
- Telecommunication Device; High-end Multimedia Electronics.

### ► Precision Chip Resistor Construction

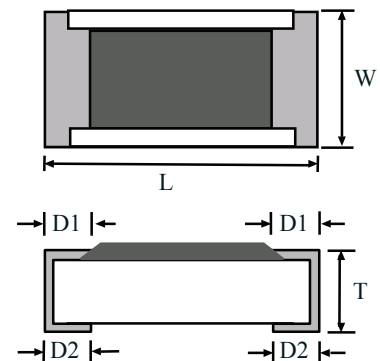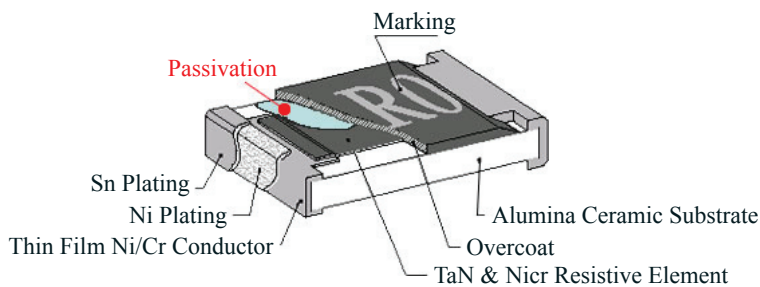

### ► Precision Chip Resistor Dimensions (Unit: mm)

Codes	L	W	T	D1	D2
PR02	1.00 $\pm$ 0.05	0.50 $\pm$ 0.05	0.30 $\pm$ 0.05	0.20 $\pm$ 0.10	0.20 $\pm$ 0.10
PR03	1.55 $\pm$ 0.10	0.80 $\pm$ 0.10	0.45 $\pm$ 0.10	0.30 $\pm$ 0.20	0.30 $\pm$ 0.20
PR05	2.00 $\pm$ 0.15	1.25 $\pm$ 0.15	0.55 $\pm$ 0.10	0.30 $\pm$ 0.20	0.40 $\pm$ 0.25
PR06	3.05 $\pm$ 0.15	1.55 $\pm$ 0.15	0.55 $\pm$ 0.10	0.42 $\pm$ 0.20	0.35 $\pm$ 0.25
PR10	4.90 $\pm$ 0.15	2.40 $\pm$ 0.15	0.55 $\pm$ 0.10	0.60 $\pm$ 0.30	0.50 $\pm$ 0.25
PR12	6.30 $\pm$ 0.15	3.10 $\pm$ 0.15	0.55 $\pm$ 0.10	0.60 $\pm$ 0.30	0.50 $\pm$ 0.25


### ► Precision Chip Resistor Standard Electrical Specifications

Type	Power Rating at 70 $^{\circ}\text{C}$	Operating Temp. Range	Max Operating Voltage	Max Overloading Voltage	Resistance Tolerance	Resistance Range	TCR (PPM / $^{\circ}\text{C}$ )
PR02 (0402)	1/16W	-55 ~ +155 $^{\circ}\text{C}$	25V	50V	$\pm 0.10\%$ $\pm 0.25\%$ $\pm 0.50\%$	25 $\Omega$ ~25K $\Omega$	$\pm 25$ $\pm 50$
PR03 (0603)	1/16W	-55 ~ +155 $^{\circ}\text{C}$	50V	100V	$\pm 0.10\%$ $\pm 0.25\%$ $\pm 0.50\%$	25 $\Omega$ ~200K $\Omega$	$\pm 25$ $\pm 50$
PR05 (0805)	1/10W	-55 ~ +155 $^{\circ}\text{C}$	100V	200V	$\pm 0.10\%$ $\pm 0.25\%$ $\pm 0.50\%$	25 $\Omega$ ~400K $\Omega$	$\pm 25$ $\pm 50$
PR06 (1206)	1/8W	-55 ~ +155 $^{\circ}\text{C}$	150V	300V	$\pm 0.10\%$ $\pm 0.25\%$ $\pm 0.50\%$	25 $\Omega$ ~500K $\Omega$	$\pm 25$ $\pm 50$
PR10(2010)	1/4W	-55 ~ +155 $^{\circ}\text{C}$	150V	300V	$\pm 0.10\%$ $\pm 0.25\%$ $\pm 0.50\%$	25 $\Omega$ ~600K $\Omega$	$\pm 25$ $\pm 50$
PR12 (2512)	1/2W	-55 ~ +155 $^{\circ}\text{C}$	150V	300V	$\pm 0.10\%$ $\pm 0.25\%$ $\pm 0.50\%$	25 $\Omega$ ~600K $\Omega$	$\pm 25$ $\pm 50$




# Chip Resistor

## ► Derating Curve - Precision Chip Resistors

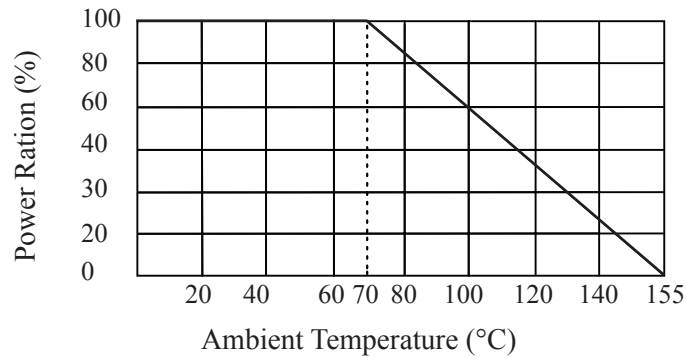

## ► Recommend Land Pattern (Unit: mm) - Precision Chip Resistors

Codes	A	B	C
PR12	4.90	1.60	3.10±0.2
PR10	3.60	1.40	2.50±0.2
PR06	2.00	1.15	1.70±0.2
PR05	1.00	1.00	1.35±0.2
PR03	0.80	1.00	0.90±0.2
PR02	0.50	0.50	0.60±0.2

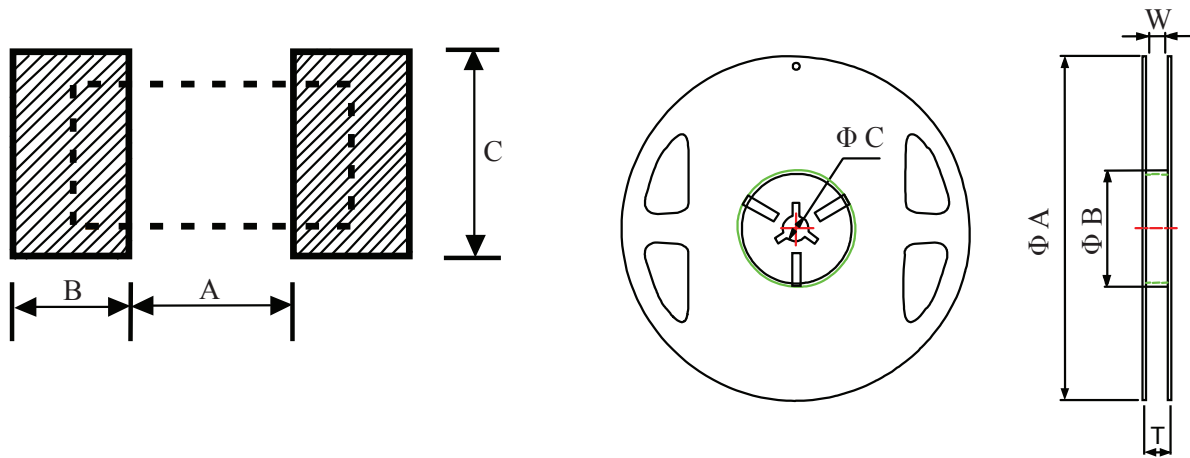


## ► Packaging Quantity & Reel Specifications (Unit: mm) - Precision Chip Resistors

Codes	ΦA	ΦB	ΦC	W	T	Paper Tape (PCS)	Emboss Plastic Tape (PCS)
PR02	178±1	60.0±0.5	13.0±0.20	9.00±0.50	12.0±0.15	10,000	-
PR03	178±1	60.0±0.5	13.0±0.20	9.00±0.50	12.0±0.15	5,000	-
PR05	178±1	60.0±0.5	13.0±0.20	9.00±0.50	12.0±0.15	5,000	-
PR06	178±1	60.0±0.5	13.0±0.20	9.00±0.50	12.0±0.15	5,000	-
PR10	178±1	60.2±0.5	13.0±1.00	13.2±0.50	16.0±0.20	-	4,000
PR12	178±1	60.2±0.5	13.0±0.50	13.2±0.50	16.0±0.20	-	4,000




# Chip Resistor

## ► Paper Tape Specifications (Unit: mm) - Precision Chip Resistors

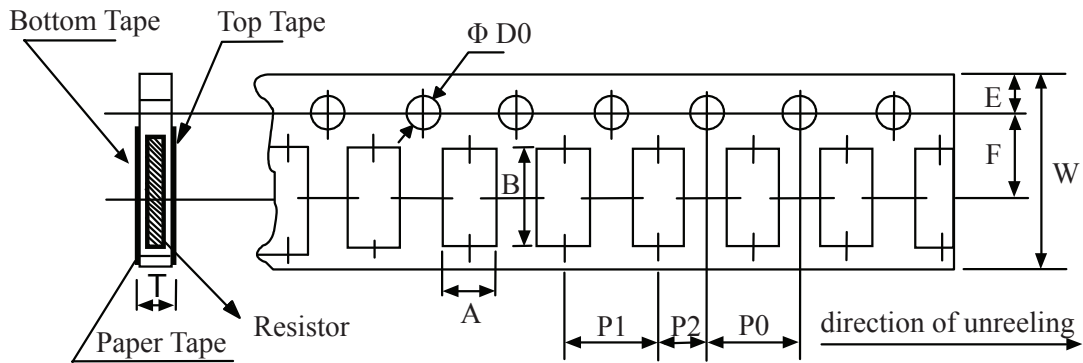

Codes	A	B	W ±0.10	E ±0.05	F ±0.05	P0 ±0.10	P1	P2 ±0.05	ΦD0	T
PR02	0.67±0.03	1.15±0.03	8.00	1.75	3.5	4.00	2.00±0.05	2.00	1.54±0.03	0.40±0.03
PR03	1.10±0.05	1.90±0.05	8.00	1.75	3.5	4.00	4.00±0.10	2.00	1.55±0.05	0.60±0.03
PR05	1.60±0.05	2.37±0.05	8.00	1.75	3.5	4.00	4.00±0.10	2.00	1.55±0.05	0.75±0.05
PR06	2.00±0.05	3.55±0.05	8.00	1.75	3.5	4.00	4.00±0.10	2.00	1.55±0.05	0.75±0.05

## ► Precision Chip Resistor Emboss Plastic Tape Specifications (Unit: mm)

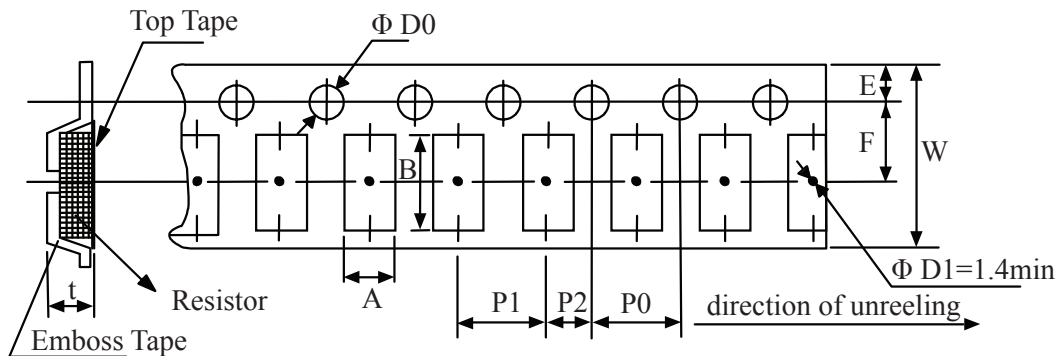

Codes	A	B	W	E	F	P0	P1	P2	ΦD0	T
PR10	2.85 ±0.10	5.45 ±0.10	12.0 ±0.10	1.75 ±0.10	5.5 ±0.05	4.00 ±0.05	4.00 ±0.10	2.00 ±0.05	1.50 +0.10	1.00 ±0.20
PR12	3.40 ±0.10	6.65 ±0.10	12.0 ±0.10	1.75 ±0.10	5.5 ±0.05	4.00 ±0.05	4.00 ±0.10	2.00 ±0.05	1.50 +0.10	1.00 ±0.20



# Chip Resistor

## ► Environmental Characteristics - Precision Chip Resistor

Test Item	Specification		Test Method
	Size 0603/ 0805/ 1206/ 2010/ 2512	Size 0402	
Short Time Overload	≤ ±0.02%	≤ ±0.1%	RCWV*2.5 or Max Overloading Voltage, 2 seconds
Thermal Shock	≤ ±0.02%	≤ ±0.1%	MIL-STD-202F Method 107G -55°C~125°C, 100 cycles
Load Life	≤ ±0.05%	≤ ±0.25%	MIL-STD-202F Method 108A RCWV, 70°C, 1.5 hours ON, 0.5 hours OFF, total 1000~1048 hours
Humidity(Steady State)	≤ ±0.05%	≤ ±0.5%	MIL-STD-202F Method 103B 40°C , 90~95%RH, RCWV 1.5 hours ON, 0.5 hours OFF, total 1000~1048hours
Resistance to Dry Heat	≤ ±0.05%	≤ ±0.5%	JIS-C-5202-7.2 1000 hours @ +125°C without load
Resistance to Soldering Heat	≤ ±0.02%	≤ ±0.1%	MIL-STD-202F Method 210E 260±°C, 10±1seconds

Note: Storage Temperature: 25±3°C; Humidity: <80%RH

## ► How to Order

PR	03	D	T	D	1000
①	②	③	④	⑤	⑥

### ① Product Type

### ② Dimensions(L×W)

Code	Dimensions(L×W)
02	1.00×0.50mm
03	1.60×0.80mm
05	2.00×1.25mm
06	3.00×1.50mm
10	4.90×2.40mm
12	6.30×3.10mm

### ③ Resistance Tolerance

Code	Resistance Tolerance
B	±0.10%
C	±0.25%
D	±0.50%

### ④ Packaging

Code	Packaging
T	Taping Reel
B	Bulk

### ⑤ TCR

Code	TCR
C	±25ppm
D	±50ppm

### ⑥ Resistance

Code	Resistance
1000	100Ω
2201	2200Ω
1002	10000Ω
4992	49900Ω
1003	100000Ω